



PREFIRRED

by Benchmark Foam

Cost-saving solutions for interior or exterior applications

Examples:

- Cold, uninsulated concrete walls
- Concrete masonry unit (CMU) walls
- Residential basements
- Commercial/Industrial building CMU above-grade walls

Specifications:

- Manufactured with expanded polystyrene (EPS)
- Available in 1½", 2" or custom thicknesses and 4'x 8' or 2'x 8' sheets
- 1"x 2" solid wood furring strips embedded 16" or 24" on center

Applications:


- Interior: Furring strips are used to attach PreFurred to concrete, then used again to attach interior finishes, such as gypsum board or other code-compliant products
- Exterior: Furring strips are used to attach PreFurred to CMU walls, then used again to attach siding

Benefits:

- No need for framing studs
- Quickly pays for itself in energy savings
- 1½" thick sheets provide stable R-6 level of insulation; 2" thick sheets provide R-8
- Prevents air infiltration
- Continuous insulation eliminates thermo shorts
- EPS is resistant to mold
- EPS is recyclable and environmentally responsible

Visit us online at
www.BenchmarkFoam.com

To place an order or for more information,
call us at 800-658-3444

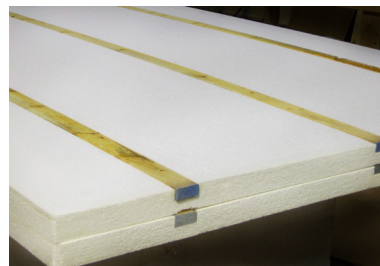

Benchmark Foam knows that your business depends on our product arriving on time. Our service response is so dependable we back it with Benchmark Foam's **On-Time Guarantee**. Your product will be shipped and arrive by the agreed-to arrival date or we will **discount your invoice 10 percent**. We work to accommodate customer needs, giving you confidence when you place an order, even if it needs to be rushed. And we do not have truckload quotas, so no matter how large or small, your order will be shipped on time.

401 Pheasant Ridge Drive • Watertown, SD 57201 • Phone: 605-886-8084 • Toll Free: 800-658-3444 • Fax: 605-886-8099 • www.BenchmarkFoam.com

Quick response is our guarantee.